



AL-RM33 WATER COOLER

SERIES



- 💧 1.9L Stainless Steel Tank; up to 30L of Chilled Water Per Hour
- 💧 Glass/Bottle Filler Option Available
- 💧 New IP33 Rating
- 💧 100% Rust-Proof Cabinet
- 💧 Impact-Resistant Construction
- 💧 Complete with the Aqua L'eau Dual Water Filtration System
- 💧 Expansion Valve to Protect from Mains Water Pressure Surges
- 💧 12-Month Comprehensive Warranty



WaterMark
WMTS-105
WM-022542



www.aqualeau.com.au

@aqualeau_



AL-RM33 WATER COOLER

SERIES

GENERAL FEATURES

RUST PROOF CABINET: The new IP33 rating gives extra protection against dust, dirt and moisture, making the AL-RM33 Series perfect for construction sites, schools and mines. This unit must be protected from the elements.

TANK: 1.9-litre stainless steel tank.

SERVICE ACCESS: The front access panel is secured with four concealed stainless steel screws. Removing this panel allows access for servicing and maintenance.

VANDAL RESISTANCE: The AL-RM33 Series features has a one-piece, rotamoulded polyethylene cabinet, which can be easily anchored to almost any surface. Along with the internally fitted drain, this design provides unmatched vandal resistance.

WATER FILTRATION: An external Aqua L'eau Dual Water Filtration System reduces sediment, chemicals, organic compounds and impurities, which can adversely affect the quality and taste of your drinking water.

OPTIONAL FEATURES

TEMPORARY DRAIN KIT: 1.5-meter kit available for temporary installations, such as construction sites.

CAPACITY

MODEL NUMBER	AMBIENT TEMP	INLET TEMP	LITRES/HR 10°C WATER	RESERVOIR VOLUME
AL-RM33	32°C	27°C	30 LPH	1.9 Litre

- Based on intermittent use under environmental conditions of ARI Standard 1010 and installation requirements of ARI Standard 1020.
- Due to our policy of continuous development, specifications are subject to change without notice.
- Colour is as close to actual as printing processes allow.

INSTALLATION CONNECTIONS

ELECTRICAL: Includes a 1.5-metre power cord with a standard 3-pin plug. Power consumption: Ambient Temp 25°C (kW.h/24h): 0.044. Power cord inlet is 300mm from the base on the rear of the unit.

WATER INLET: Industry-standard 1/2" female BSP threaded connection is situated at the rear of the cooler (see installation instructions for details).

DRAIN OUTLET: The drain outlet and integrated P-trap provide an industry-standard 40mm connection located on the rear of the cooler (see installation instructions for details).


To be installed in accordance with local plumbing laws. Failure to install a certified Pressure Limiting Valve will void warranty.

PRODUCT CODES

AL-RM33	AL-RM33 with bubbler tap only
AL-RM33GF	AL-RM33 with bubbler tap glass filler

WARRANTY

The warranty provides comprehensive parts and labour coverage for 12 months from the date of original sale.

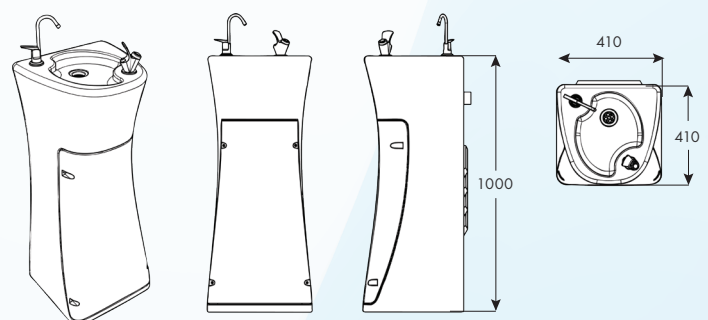

INLET:
860mm ABOVE BASE
100mm LEFT OF CENTRE LINE
(from back)

OUTLET:
860mm ABOVE BASE
30mm LEFT OF CENTRE LINE
(from back)

SHIPPING DETAILS:

PACKED WEIGHT: 28kg PACKED VOLUME: 0.208M3
PACKED DIMENSIONS: 420mmW x 420mmD x 1180mmH