

TOTAL FILTERED WATER SOLUTIONS



WATER COOLER RANGE





AL-D19 WATER COOLER AL-SD19 WATER COOLER

SERIES



- 3.3L Stainless Steel Cold Tank; up to 3.2L of Chilled Water Per Hour
- 1.8L Hot Tank; up to 2.55L of Hot Water Per Hour
- Stylish High-Gloss Black and Stainless Steel Look Cabinet
- Available in Hot/Cold or Cool/Cold
- Hygienic Push Taps
- Connects to Mains Water Supply
- Complete with the Aqua L'eau Dual Water Filtration System
- Access Plate on the Side of AL-SD19C
- 36-Month Comprehensive Warranty



www.aqualeau.com.au

@aqualeau_



AL-D19 AL-SD19 WATER COOLER

SERIES

GENERAL FEATURES

Featuring a high-gloss front, brushed steel sides and a stylish slim design, the AL-D19 Series Water Cooler is perfect for any home or office.

COLD TANK: 3.3-litre Type 304 stainless steel tank for superior chilling. The highly polished surface makes it easy to clean and maintain.

HOT TANK: 1.8-litre Type 304 stainless steel with 500-watt sheathed heater ensures precise temperature control. The on/off switch is easily accessible at the back of the unit.

CABINET: High-gloss black front with brushed silver steel sides. The top and front panels are moulded ABS plastic, the side panels are high polymer coated steel.

TAPS: NSF-approved, hygienic and durable polypropylene push taps with self-closing design and fast flow. Hot safety tap comes as standard on hot/cold model.

FLOAT ASSEMBLY: Dual float system maintains the water level and shuts off when full.

WATER FILTRATION: An external Aqua L'eau Dual Water Filtration System reduces sediment, chemicals, organic compounds and impurities, which can adversely affect the quality and taste of your drinking water.

OPTIONAL EXTRAS

AL-CD WHITE OR BLACK: Our cup dispensers come in black or white to match either colour unit. The Aqua L'eau paper and plastic cups are designed to fit our dispensers.

INSTALLATION

To be installed in accordance with local plumbing laws. Failure to install a certified Pressure Limiting Valve will void warranty.

SPECIFICATIONS

REFRIGERATION: Gas R134A. The refrigerant flow is controlled by a capillary tube which has no moving parts. The compressor is hermetically sealed with an automatic overload protector. Lubricant is not needed.

ELECTRICAL: Certificate number 160793. 220v 50hz single phase. A 1.5-metre power cord is supplied. Full load current is 1.2 amps.

CONDENSER: Quietly operating, air cooled with no moving parts.

PERFORMANCE

Tap 1	Approx. 4-10°C
Tap 2	Room Temperature
Hot tap	Approx. 84-89°C

ROOM TEMP °C	21	27	32
150ML CUPS/HR 10°C	22	17	13
LITRES/HR AT 10°C	3.2	2.6	2
HOT WATER DELIVERY: 15 x 170ml cups per hour			

**Intermittent use only, continuous use will result in reduced performance.*

SHIPPING WEIGHTS & DIMENSIONS

MODEL	WEIGHT	MODEL	WEIGHT	WIDTH	DEPTH	HEIGHT
AL-D19C	17kg	D19CH	19kg	29cm	34cm	100cm
AL-SD19C	16kg	SD19CH	18kg	29cm	51cm	53cm

WARRANTY

The Aqua L'eau AL-D19 Series is covered by our 36-month Comprehensive Warranty (copy available on request). The warranty provides comprehensive parts and labour coverage for the period of 36 months from the date of original sale.



AL-D19 WATER COOLER AL-SD19 WATER COOLER

SERIES



- 3.3L Stainless Steel Cold Tank; up to 3.2L of Chilled Water Per Hour
- 1.8L Hot Tank; up to 2.55L of Hot Water Per Hour
- Stylish High-Gloss White and Stainless Steel Look Cabinet
- Available in Hot/Cold or Cool/Cold
- Hygienic Push Taps
- Connects to Mains Water Supply
- Complete with the Aqua L'eau Dual Water Filtration System
- Access Plate on the Side of AL-SD19C
- 36-Month Comprehensive Warranty



www.aqualeau.com.au

@aqualeau_



AL-D19 AL-SD19 WATER COOLER

SERIES

GENERAL FEATURES

Featuring a high-gloss front, brushed steel sides and a stylish slim design, the AL-D19 Series Water Cooler is perfect for any home or office.

COLD TANK: 3.3-litre Type 304 stainless steel tank for superior chilling. The highly polished surface makes it easy to clean and maintain.

HOT TANK: 1.8-litre Type 304 stainless steel with 500-watt sheathed heater ensures precise temperature control. The on/off switch is easily accessible at the back of the unit.

CABINET: High-gloss white front with brushed silver steel sides. The top and front panels are moulded ABS plastic, the side panels are high polymer coated steel.

TAPS: NSF-approved, hygienic and durable polypropylene push taps with self-closing design and fast flow. Hot safety tap comes as standard on hot/cold model.

FLOAT ASSEMBLY: Dual float system maintains the water level and shuts off when full.

WATER FILTRATION: An external Aqua L'eau Dual Water Filtration System reduces sediment, chemicals, organic compounds and impurities, which can adversely affect the quality and taste of your drinking water.

OPTIONAL EXTRAS

AL-CD WHITE OR BLACK: Our cup dispensers come in black or white to match either colour unit. The Aqua L'eau paper and plastic cups are designed to fit our dispensers.

INSTALLATION

To be installed in accordance with local plumbing laws. Failure to install a certified Pressure Limiting Valve will void warranty.

SPECIFICATIONS

REFRIGERATION: Gas R134A. The refrigerant flow is controlled by a capillary tube which has no moving parts. The compressor is hermetically sealed with an automatic overload protector. Lubricant is not needed.

ELECTRICAL: Certificate number 160793. 220v 50hz single phase. A 1.5-metre power cord is supplied. Full load current is 1.2 amps.

CONDENSER: Quietly operating, air cooled with no moving parts.

PERFORMANCE

Tap 1	Approx. 4-10°C
Tap 2	Room Temperature
Hot tap	Approx. 84-89°C

ROOM TEMP °C	21	27	32
150ML CUPS/HR 10°C	22	17	13
LITRES/HR AT 10°C	3.2	2.6	2
HOT WATER DELIVERY: 15 x 170ml cups per hour			

**Intermittent use only, continuous use will result in reduced performance.*

SHIPPING WEIGHTS & DIMENSIONS

MODEL	WEIGHT	MODEL	WEIGHT	WIDTH	DEPTH	HEIGHT
AL-D19C	17kg	D19CH	19kg	29cm	34cm	100cm
AL-SD19C	16kg	SD19CH	18kg	29cm	51cm	53cm

WARRANTY

The Aqua L'eau AL-D19 Series is covered by our 36-month Comprehensive Warranty (copy available on request). The warranty provides comprehensive parts and labour coverage for the period of 36 months from the date of original sale.



AL-D25 WATER COOLER

SERIES



- Large 11L Cold Tank; up to 5.2L of Chilled Water Per Hour
- 1.6L Hot Tank; up to 2.55L of Hot Water Per Hour
- Available in Black or White with a Satin Finish
- Available in Hot/Cold or Cool/Cold
- Hygienic Push Taps
- Connects to Mains Water Supply
- Complete with the Aqua L'eau Dual Water Filtration System
- Easy to Clean and Sanitise
- 36-Month Comprehensive Warranty



WaterMark
ATSS200.105
WM-022458



www.aqualeau.com.au

@aqualeau_



AL-D25 WATER COOLER

SERIES

GENERAL FEATURES

The AL-D25 Series, featuring an elegant satin finish, is the latest addition to our range of POU water coolers and adds a touch of class to any home or office.

COLD TANK: Huge 11-litre, high density polypropylene tank designed to be tough, rustproof and is easy to clean with its large radius.

HOT TANK: 1.6-litre Type 304 stainless steel with 500-watt sheathed heater ensures precise temperature control. The on/off switch is easily accessible at the back of the unit.

CABINET: Available in satin black or white, with U.V. treated ABS top and front panels and zinc-coated steel side panels.

TAPS: NSF-approved, hygienic, durable polypropylene push taps with self-closing design and fast flow. Hot safety tap comes as standard on hot/cold model.

FLOAT ASSEMBLY: Dual float system maintains the water level and shuts water off when tank is full.

WATER FILTRATION: An external Aqua L'eau Dual Water Filtration System reduces sediment, chemicals, organic compounds and impurities, which can adversely affect the quality and taste of your drinking water.

OPTIONAL EXTRAS

AL-CD WHITE OR BLACK: Our cup dispensers come in black or white to match either colour unit. The Aqua L'eau paper and plastic cups are designed to fit our dispensers.

INSTALLATION

To be installed in accordance with local plumbing laws. Failure to install a certified Pressure Limiting Valve will void warranty.

SPECIFICATIONS

REFRIGERATION: Gas R134A. The refrigerant flow is controlled by a capillary tube which has no moving parts. The compressor is hermetically sealed with an automatic overload protector. Lubricant is not needed.

ELECTRICAL: Certificate number 160793. 220v 50hz single phase. A 1.5-metre power cord is supplied. Full load current is 1.2 amps.

CONDENSER: Quietly operating, air cooled with no moving parts.

PERFORMANCE

Tap 1	Approx. 4-10°C
Tap 2	Room Temperature
Hot tap	Approx. 84-89°C

ROOM TEMP °C	21	27	32
150ML CUPS/HR 10°C	35	28	16
LITRES/HR AT 10°C	5.2	4.2	2.4
HOT WATER DELIVERY: 15 x 170ml cups per hour			

**Intermittent use only, continuous use will result in reduced performance.*

SHIPPING WEIGHTS & DIMENSIONS

MODEL	WEIGHT	MODEL	WEIGHT	WIDTH	DEPTH	HEIGHT
AL-D25	21kg	D25CH	23kg	33cm	39cm	115cm

WARRANTY

The Aqua L'eau AL-D25 Series is covered by our 36-month Comprehensive Warranty (copy available on request). The warranty provides comprehensive parts and labour coverage for the period of 36 months from the date of original sale.



AL-D5 WATER COOLER

SERIES



- 💧 The Most Reliable POU Cooler on the Market
- 💧 Huge 14.3L Cold Tank; up to 6.6L of Chilled Water Per Hour
- 💧 1.8L Hot Tank; up to 1.8L of Hot Water Per Hour
- 💧 Available in Bench Top or Floor Standing and Hot/Cold or Cool/Cold
- 💧 Hygienic Push Taps
- 💧 Connects to Mains Water Supply
- 💧 Complete with the Aqua L'eau Dual Water Filtration System
- 💧 Easy to Clean and Sanitise
- 💧 36-Month Comprehensive Warranty



WaterMark
ATSS200.105
WM-022458



www.aqualeau.com.au

@aqualeau_



AL-D5 WATER COOLER

SERIES

GENERAL FEATURES

The AL-D5 Series sets the standard for entry-level POU water coolers. While often copied, none have matched the quality or longevity of the AL-D5 Series.

COLD TANK: Huge 14.3-litre, high density polypropylene tank designed to be tough, rustproof and is easy to clean with its large radius.

HOT TANK: 1.8-litre Type 304 stainless steel with 500-watt sheathed heater ensures precise temperature control. The on/off switch is easily accessible at the back of the unit.

CABINET: Gloss Cloud White finish with U.V. treated ABS top and front panels. Side panels are zinc-coated steel, covered with a polymer polyester resin.

TAPS: NSF-approved, durable polypropylene lever-type taps with a self-closing design and fast flow. Hot safety tap comes as standard on hot/cold model. Optional push taps now available.

FLOAT ASSEMBLY: One stage polyethylene float system maintains the water level and shuts off when full.

WATER FILTRATION: An external Aqua L'eau Dual Water Filtration System reduces sediment, chemicals, organic compounds and impurities, which can adversely affect the quality and taste of your drinking water.

OPTIONAL EXTRAS

AL-CD2 – CUP DISPENSER: The AL-CD2 is perfectly colour matched to suit the Aqua L'eau Series Water Cooler Range. The Aqua L'eau paper and plastic cups are specifically made to fit the AL-CD2.

INSTALLATION

To be installed in accordance with local plumbing laws. Failure to install a certified Pressure Limiting Valve will void warranty.

SPECIFICATIONS

REFRIGERATION: Gas R134A. The refrigerant flow is controlled by a capillary tube which has no moving parts. The compressor is hermetically sealed with an automatic overload protector. Lubricant is not needed.

ELECTRICAL: Certificate number 160793. 220v 50hz single phase. A 1.5-metre power cord is supplied. Full load current is 1.2 amps.

CONDENSER: Quietly operating, air cooled with no moving parts.

PERFORMANCE

Tap 1	Approx. 4-10°C
Tap 2	Room Temperature
Hot tap	Approx. 84-89°C

CAPACITY

ROOM TEMP °C	150ML CUPS/HR 10°C	LITRES/HR AT 10°C
21°C	44	6.6
27°C	32	4.8
32°C	18	2.7

SHIPPING WEIGHTS & DIMENSIONS

MODEL	WEIGHT	MODEL	WEIGHT	WIDTH	DEPTH	HEIGHT
AL-D5C	19kg	D5CH	21kg	33cm	33cm	115cm
AL-SD5C	16kg	SD5CH	18kg	33cm	33cm	70cm

WARRANTY

The Aqua L'eau Series is covered by our 36-month Comprehensive Warranty (copy available on request). The warranty provides comprehensive parts and labour coverage for the period of 36 months from the date of original sale.



AL-RM33 WATER COOLER

SERIES



- 💧 1.9L Stainless Steel Tank; up to 30L of Chilled Water Per Hour
- 💧 Glass/Bottle Filler Option Available
- 💧 New IP33 Rating
- 💧 100% Rust-Proof Cabinet
- 💧 Impact-Resistant Construction
- 💧 Complete with the Aqua L'eau Dual Water Filtration System
- 💧 Expansion Valve to Protect from Mains Water Pressure Surges
- 💧 12-Month Comprehensive Warranty



WaterMark
WMTS-105
WM-022542



www.aqualeau.com.au

@aqualeau_



AL-RM33 WATER COOLER

SERIES

GENERAL FEATURES

RUST PROOF CABINET: The new IP33 rating gives extra protection against dust, dirt and moisture, making the AL-RM33 Series perfect for construction sites, schools and mines. This unit must be protected from the elements.

TANK: 1.9-litre stainless steel tank.

SERVICE ACCESS: The front access panel is secured with four concealed stainless steel screws. Removing this panel allows access for servicing and maintenance.

VANDAL RESISTANCE: The AL-RM33 Series features has a one-piece, rotamoulded polyethylene cabinet, which can be easily anchored to almost any surface. Along with the internally fitted drain, this design provides unmatched vandal resistance.

WATER FILTRATION: An external Aqua L'eau Dual Water Filtration System reduces sediment, chemicals, organic compounds and impurities, which can adversely affect the quality and taste of your drinking water.

OPTIONAL FEATURES

TEMPORARY DRAIN KIT: 1.5-meter kit available for temporary installations, such as construction sites.

CAPACITY

MODEL NUMBER	AMBIENT TEMP	INLET TEMP	LITRES/HR 10°C WATER	RESERVOIR VOLUME
AL-RM33	32°C	27°C	30 LPH	1.9 Litre

- Based on intermittent use under environmental conditions of ARI Standard 1010 and installation requirements of ARI Standard 1020.
- Due to our policy of continuous development, specifications are subject to change without notice.
- Colour is as close to actual as printing processes allow.

INSTALLATION CONNECTIONS

ELECTRICAL: Includes a 1.5-metre power cord with a standard 3-pin plug. Power consumption: Ambient Temp 25°C (kW.h/24h): 0.044. Power cord inlet is 300mm from the base on the rear of the unit.

WATER INLET: Industry-standard 1/2" female BSP threaded connection is situated at the rear of the cooler (see installation instructions for details).

DRAIN OUTLET: The drain outlet and integrated P-trap provide an industry-standard 40mm connection located on the rear of the cooler (see installation instructions for details).


To be installed in accordance with local plumbing laws. Failure to install a certified Pressure Limiting Valve will void warranty.

PRODUCT CODES

AL-RM33	AL-RM33 with bubbler tap only
AL-RM33GF	AL-RM33 with bubbler tap glass filler

WARRANTY

The warranty provides comprehensive parts and labour coverage for 12 months from the date of original sale.

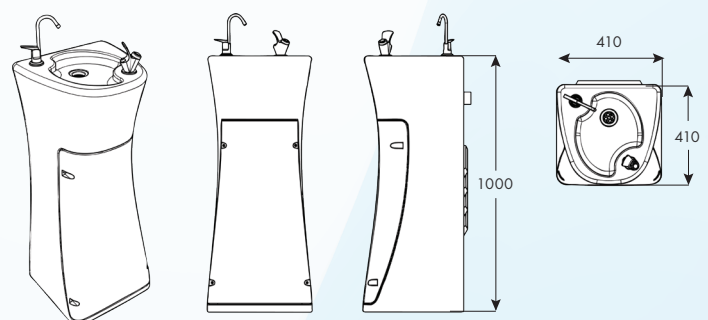

INLET:
860mm ABOVE BASE
100mm LEFT OF CENTRE LINE
(from back)

OUTLET:
860mm ABOVE BASE
30mm LEFT OF CENTRE LINE
(from back)

SHIPPING DETAILS:

PACKED WEIGHT: 28kg PACKED VOLUME: 0.208M3
PACKED DIMENSIONS: 420mmW x 420mmD x 1180mmH



www.aqualeau.com.au

📷 aqualeau_